




SKF BEARING MANUFACTURING CO.,LTD.

65 mm x 120 mm x 23 mm NTN 6213LLB deep groove ball bearings

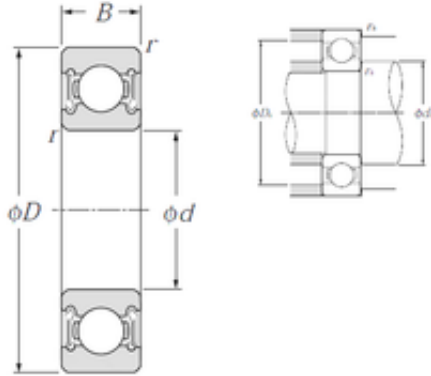

Bearing No. 6213LLB

6213LLB Bearing 2D drawings and 3D CAD models

Size	65x120x23 mm
Bore Diameter	65 mm
Outer Diameter	120 mm
Width	23 mm
d	65 mm
D	120 mm
B	23 mm
C	23 mm
r min.	1,5 mm
da min.	73 mm
da max	80,5 mm
Da max.	112 mm
ra max.	1,5 mm
Weight	0,99 Kg
Basic dynamic load rating (C)	57,5 kN
Basic static load rating (C0)	40 kN
(Grease) Lubrication Speed	5 500 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



SKF BEARING MANUFACTURING CO.,LTD.

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	65MM Bore; 120MM Outside Diameter; 23MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	2.1847
Outer Race Width	0.906 Inch 23 Millimeter
Bore	2.559 Inch 65 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	4.724 Inch 120 Millimeter
bore diameter:	65 mm
static load capacity:	40000 N
outside diameter:	120 mm



SKF BEARING MANUFACTURING CO.,LTD.

precision rating:	ISO Class 0
overall width:	23 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	23 mm
snap ring included:	Without Snap Ring
outer ring width:	23 mm
internal clearance:	CN
maximum rpm (grease):	5500 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1.5 mm
dynamic load capacity:	57500 N
manufacturer product page:	Click here